



Shanghai ShiBang Machinery CO.,LTD  
-----PRODUCT INTRODUCTION-----

Portable type series  
mobile Jaw crushing Plant

International Dept.1: Tel: 0086-21-58386189 Fax:0086-21-58386211

International Dept.2: Tel: 0086-21-58386176 Fax:0086-21-58386211

International Dept.3: Tel: 0086-21-58386186 Fax:0086-21-58386211

E-mail: [sbm@sbmchina.com](mailto:sbm@sbmchina.com)

Yahoo! ID: [sbmcrusher@yahoo.com](mailto:sbmcrusher@yahoo.com) | Skype ID: [sbmchina](#)

Office Add: No.416 Jianye Road, Pudong New Area, Shanghai, China


Postcode: 201201

## Portable type series mobile Jaw crushing Plant

SBM company one of the most famous rock and mineral processing company in the world, is launching a new comprehensive portable plant for efficient fully mobile crushing.

Features of portable jaw crushing plant main unit:

-- High crushing ratio, powerful crushing.

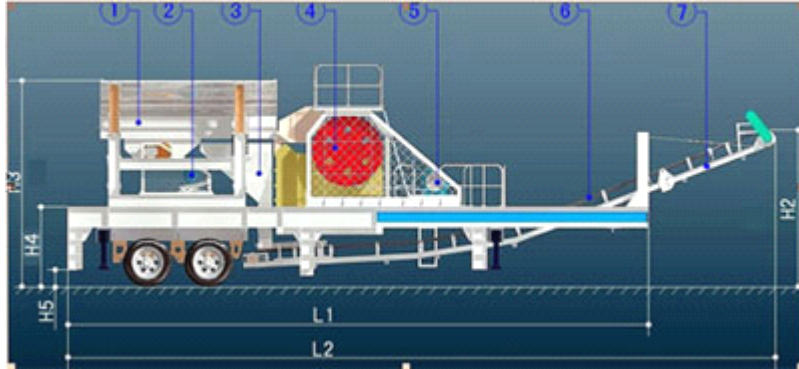

## portable jaw crushing plant highlights

PE Series high performance jaw crushers

Incorporated the feeder and vibrating screen into the crusher

Everything on board: crusher, feeders, screens, belts and power installations

Quick road transportation thanks to king pin arrangement

Installation support legs on the track, quick to set-up

Electric motor and control cabinet are on the same truck

1, vibrating feeder, 2, motor of feeder 3, hopper of feeder 4, jaw crusher 5, motor of jaw crusher 6, standard belt conveyor 7, extended belt conveyor



International Dept.1: Tel: 0086-21-58386189 Fax:0086-21-58386211  
International Dept.2: Tel: 0086-21-58386176 Fax:0086-21-58386211  
International Dept.3: Tel: 0086-21-58386186 Fax:0086-21-58386211

**Specification and model of main unit:**

Parameter Model	Feeder Model	Jaw crusher Model	Belt conveyor Model	Extended conveyor	Generator	Capacity	Power
YG938E69	GZD-960X380	PE600X900	B650X7M	adapting	adapting	70-150t/h	91.5KW
YG1142E710	GZD1100X4200	PE750X1060	B800X9M	adapting	adapting	80-200t/h	134KW
YG1349E912	GZD-1300X4900	PE900X1200	B1000X11M	adapting	adapting	150-300t/h	146KW

Parameter Model	Length L1	Width B1	Height H1	Max.lengthL2	Max. Height H2	Max. widthB2	Heigth of conveyor H3	Wheel	Weig ht (t)
YG938E69	12500mm	2450mm	4000mm	13200mm	4600mm	3100mm	2700mm	Paratactic double axles	42
YG1142E710	14000mm	2450mm	4800mm	15000mm	5800mm	3300mm	2700mm	Paratactic tri- axle	55
YG1349E912	15500mm	3000mm	4800mm	17000mm	5800mm	3500mm	3000mm	Paratactic quarter- axle	72

Specification of vehicle: chassis height H4: 1720MM, Height difference between chassis and wheel H5: 380MM



International Dept.1: Tel: 0086-21-58386189 Fax:0086-21-58386211  
International Dept.2: Tel: 0086-21-58386176 Fax:0086-21-58386211  
International Dept.3: Tel: 0086-21-58386186 Fax:0086-21-58386211